

EXTERIOR

FLEX SCREEN

CLIP

SCREEN FRAME-

SCREEN MESH-

RECOMMENDED EXTERIOR CLIP APPLICATION AND PLACEMENT (PLACE AT YOUR OWN DISCRETION)

CLIP APPLICATION


ANY SCREEN HEIGHT


STEP 1: WITH FLAT LEG ON EXTERIOR FACING SURFACE AND ROUNDED LEG ON INTERIOR FACING SURFACE OF SCREEN

FRAME, INSERT CLIP AS SHOWN BELOW.




USE CLIP ABOVE (GREEN). DISPOSE OF CLIPS BELOW (RED).





TYPICAL DOUBLE HUNG APPLICATION 2 CLIPS 6" OR LESS FROM CORNERS ON EACH VERTICAL LEG.

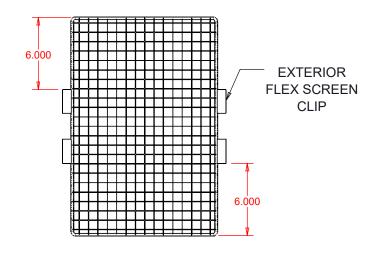

SCREEN WIDTH GREATER THAN OR EQUAL TO 48"


TYPICAL SLIDER APPLICATION 2 CLIPS 6" OR LESS FROM CORNERS ON EACH VERTICAL LEG AND 1 CLIP CENTERED ON TOP HORIZONTAL LEG.



STEP 2: ROTATE CLIP COUNTERCLOCKWISE

UNTIL ROUNDED LEG WRAPS FULLY AROUND

SCREEN FRAME AS SHOWN BELOW.





RECOMMENDED INTERIOR CLIP APPLICATION AND PLACEMENT (PLACE AT YOUR OWN DISCRETION)


CLIP APPLICATION

SCREEN HEIGHT GREATER THAN OR EQUAL TO 36"

STEP 1: WITH FLAT LEG ON EXTERIOR FACING SURFACE AND ROUNDED LEG ON INTERIOR FACING SURFACE OF SCREEN FRAME, INSERT CLIP AS SHOWN BELOW.

TYPICAL CASEMENT APPLICATION


1 CLIP CENTERED ON EACH VERTICAL LEG.
2 CLIPS ON EACH VERTICAL LEG MAY BE NEEDED FOR LARGER UNITS.







UNTIL ROUNDED LEG WRAPS FULLY AROUND

SCREEN FRAME.AS SHOWN BELOW.



USE CLIP ABOVE (GREEN).
DISPOSE OF CLIPS BELOW (RED).





SCREEN WIDTH GREATER THAN OR EQUAL TO 48"

TYPICAL AWNING APPLICATION

1 CLIP CENTERED ON TOP HORIZONTAL AND VERTICAL LEGS.
2 CLIPS ON TOP HORIZONTAL LEG MAY BE NEEDED FOR LARGER UNITS.



LARGER SIZED UNIT RECOMENDATIONS

